


< IGBT MODULES > **CM450DY-24S**

HIGH POWER SWITCHING USE INSULATED TYPE

	Collector current I_C 4 1 0 A *
	Collector-emitter voltage V _{CES} 1 2 0 0 V
	Maximum junction temperature T _{jmax} 175 °C
	●Flat base Type
	•Copper base plate
	 RoHS Directive compliance
	 UL Recognized under UL1557, File E323585
Dual (Half-Bridge)	*. DC current rating is limited by power terminals.
APPLICATION	

PLICATION

AC Motor Control, Motion/Servo Control, Power supply, etc.

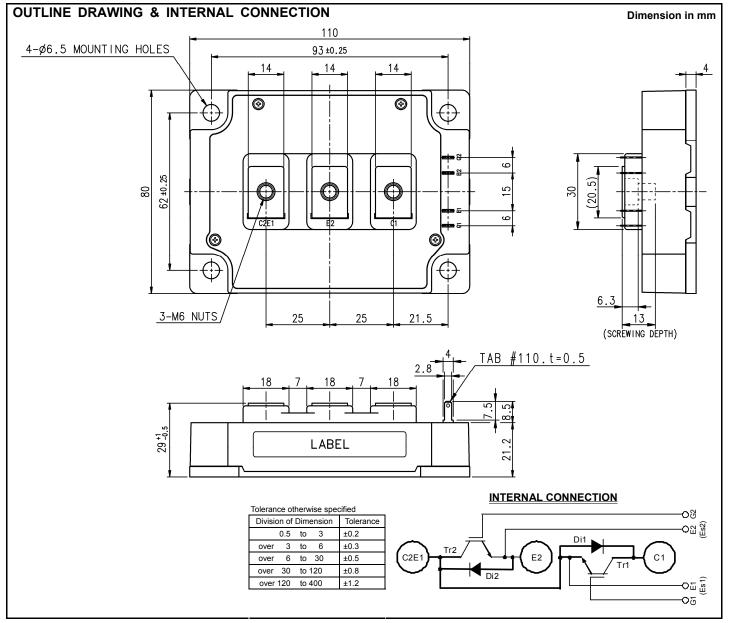

ABSOLUTE MAXIMUM RATINGS (Tj=25 °C, unless otherwise specified)

Symbol	Item	em Conditions		Unit	
V _{CES}	Collector-emitter voltage	G-E short-circuited	1200	V	
V_{GES}	Gate-emitter voltage	C-E short-circuited	± 20	V	
Ic	Collector current	DC, T _C =125 °C (Note2, 4)	410 *	^	
I _{CRM}		Pulse, Repetitive (Note3)	900	A	
P _{tot}	Total power dissipation	T _C =25 °C (Note2, 4)	3330	W	
IE (Note1)	Emitter current	(Note2)	410 *	^	
I _{ERM} (Note1)		Pulse, Repetitive (Note3)	900	- A	
Visol	Isolation voltage	Terminals to base plate, RMS, f=60 Hz, AC 1 min	2500	V	
T _{jmax}	Maximum junction temperature	Instantaneous event (overload)	175	°C	
T _{cmax}	Maximum case temperature	(Note4)	125		
Tjop	Operating junction temperature	Continuous operation (under switching)	-40 ~ +150	°C	
T _{stg}	Storage temperature	-	-40 ~ +125]	

ELECTRICAL CHARACTERISTICS (T_j=25 °C, unless otherwise specified)

Symbol	Item	Conditions	Conditions		Limits		
		Conditions		Min.	Тур.	Max.	Unit
I _{CES}	Collector-emitter cut-off current	V _{CE} =V _{CES} , G-E short-circuited		-	-	1.0	mA
I _{GES}	Gate-emitter leakage current	V_{GE} = V_{GES} , C-E short-circuited		-	-	0.5	μA
$V_{\text{GE(th)}}$	Gate-emitter threshold voltage	I _C =45 mA, V _{CE} =10 V		5.4	6.0	6.6	V
		I _C =450 A ^(Note5) ,	Tj=25 °C	-	1.80	2.25	
		V _{GE} =15 V, Terminal,	T _j =125 °C	-	2.05	-	V
M	Collector omitter acturation valtage	Refer to figure of test circuit	T _j =150 °C	-	2.10	-	
V_{CEsat}	Collector-emitter saturation voltage	I _C =450 A ^(Note5) ,	Tj=25 ℃	-	1.70	2.15	
		V _{GE} =15 V,	T _j =125 °C	-	1.90	-	V
		Chip	T _j =150 °C	-	1.95	-	1
Cies	Input capacitance			-	-	45	
C _{oes}	Output capacitance	V _{CE} =10 V, G-E short-circuited		-	-	9.0	nF
Cres	Reverse transfer capacitance			-	-	0.75	1
Q_{G}	Gate charge	V _{CC} =600 V, I _C =450 A, V _{GE} =15 V		-	1050	-	nC
t _{d(on)}	Turn-on delay time			-	-	800	1
tr	Rise time			-	-	200	1
$t_{d(off)}$	Turn-off delay time			-	-	600	ns
t _f	Fall time	- R _G =0 Ω, Inductive load		-	-	300	1
		I _E =450 A ^(Note5) ,	Tj=25 ℃	-	1.85	2.30	
		G-E short-circuited, Terminal,	T _j =125 °C	-	1.85	-	V
V _{EC} (Note1)		Refer to figure of test circuit	T _j =150 °C	-	1.85	-	1
V _{EC}	Emitter-collector voltage	I _E =450 A ^(Note5) ,	Tj=25 ℃	-	1.70	2.15	
		G-E short-circuited,	T _j =125 °C	-	1.70	-	V
		Chip	T _j =150 °C	-	1.70	-	1
t _{rr} ^(Note1)	Reverse recovery time	V _{CC} =600 V, I _E =450 A, V _{GE} =±15 V,		-	-	300	ns
Qrr (Note1)	Reverse recovery charge	$R_{G}=0 \Omega$, Inductive load		-	24	-	μC
Eon	Turn-on switching energy per pulse	V _{CC} =600 V, I _C =I _E =450 A,		-	54.9	-	
E _{off}	Turn-off switching energy per pulse			-	48	-	mJ
Err (Note1)	Reverse recovery energy per pulse	T _i =150 °C, Inductive load		-	32.4	-	mJ
R _{CC'+EE'}	Internal lead resistance	Main terminals -chip, per switch, T _c =25 °C		-	-	0.7	mΩ
r _g	Internal gate resistance	Per switch		-	4.3	-	Ω

THERMAL RESISTANCE CHARACTERISTICS

Symbol Item	Itom	Conditions	Limits			Unit
	Conditions	Min.	Тур.	Max.	Unit	
R _{th(j-c)Q}	Thermal resistance (Note4)	Junction to case, per IGBT	-	-	45	K/kW
R _{th(j-c)D}		Junction to case, per FWDi	-	-	68	K/kW
R _{th(c-s)}	Contact thermal resistance (Note4)	Case to heat sink, per 1/2 module, Thermal grease applied ^(Note6)	-	18	-	K/kW

MECHANICAL CHARACTERISTICS

Symbol Item	Conditions		Limits			Unit	
			Min.	Тур.	Max.	Onit	
Mt	Mounting torque	Main terminals	M 6 screw	3.5	4.0	4.5	N∙m
Ms		Mounting to heat sink	M 6 screw	3.5	4.0	4.5	N∙m
m	Weight	-		-	580	-	g
e _c	Flatness of base plate	On the centerline X, Y (Note7)		-100	-	+100	μm

Note1. Represent ratings and characteristics of the anti-parallel, emitter-collector free wheeling diode (FWDi).

2. Junction temperature (T_i) should not increase beyond T_{jmax} rating.

3. Pulse width and repetition rate should be such that the device junction temperature (T_j) dose not exceed T_{jmax} rating.


4. Case temperature (T_c) and heat sink temperature (T_s) are defined on the each surface (mounting side) of base plate and heat sink just under the chips. Refer to figure of chip location.

The heat sink thermal resistance should measure just under the chips.

5. Pulse width and repetition rate should be such as to cause negligible temperature rise.

6. Typical value is measured by using thermally conductive grease of λ =0.9 W/(m·K).


7. Base plate (mounting side) flatness measurement points (X, Y) are as follows of the following figure.




*. DC current rating is limited by power terminals.

RECOMMENDED OPERATING CONDITIONS


Symbol Item	Itom	Conditions	Limits			Unit
	nem		Min.	Тур.	Max.	Unit
V _{cc}	(DC) Supply voltage	Applied across C1-E2	-	600	850	V
V _{GEon}	Gate (-emitter drive) voltage	Applied across G1-Es1/G2-Es2	13.5	15.0	16.5	V
R _G	External gate resistance	Per switch	0	-	8	Ω

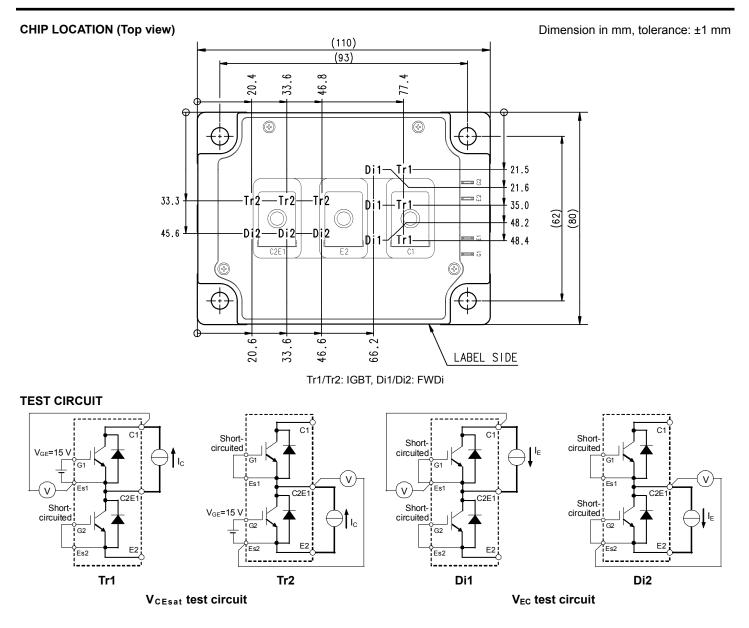

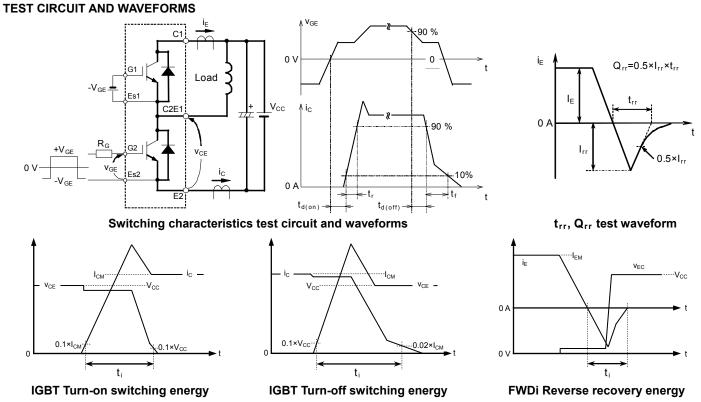


Turn-on / Turn-off switching energy and Reverse recovery energy test waveforms (Integral time instruction drawing)


PERFORMANCE CURVES

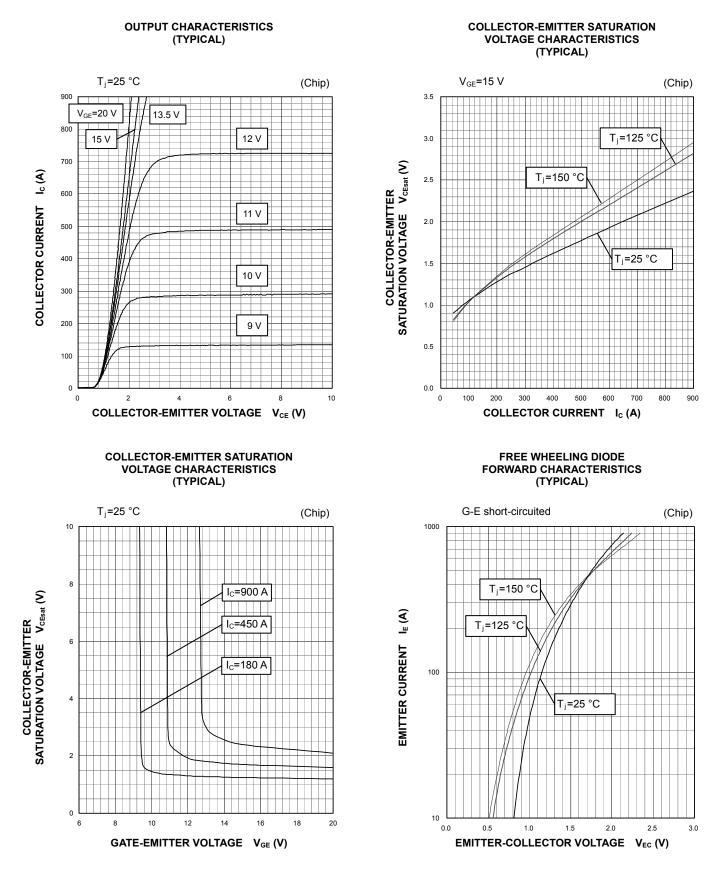



PERFORMANCE CURVES

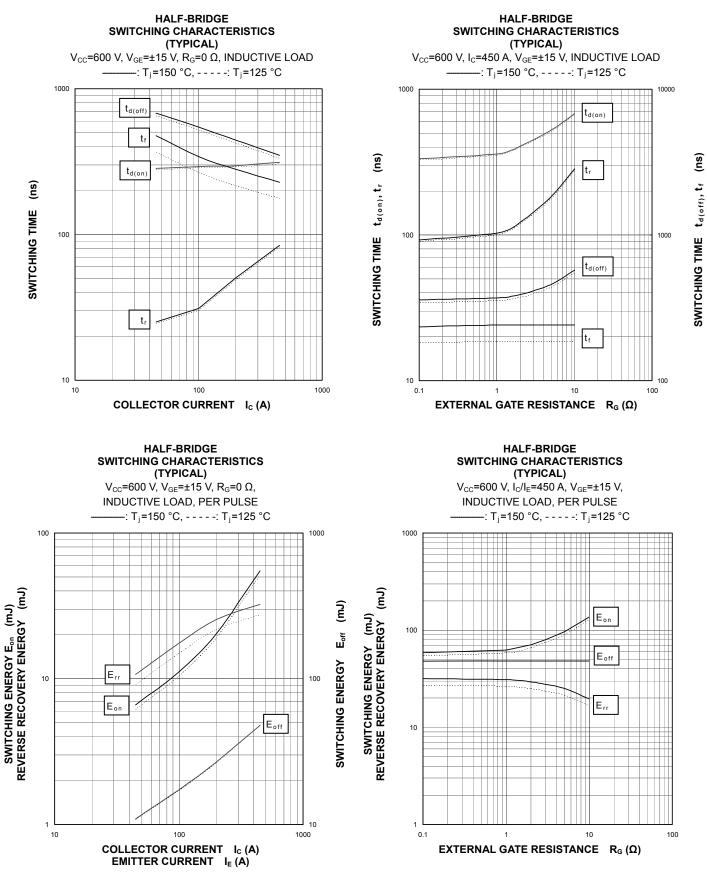


PERFORMANCE CURVES

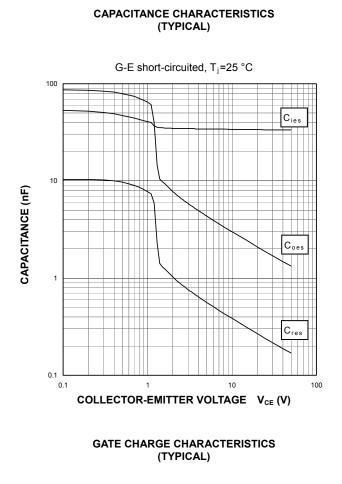

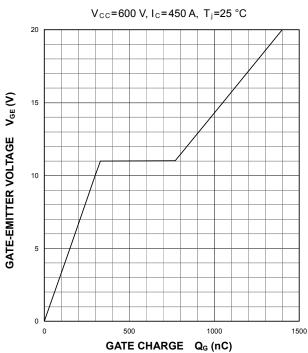

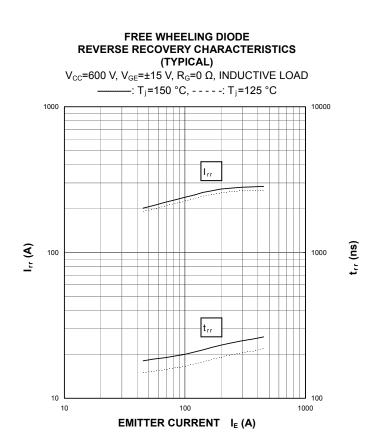

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (MAXIMUM)

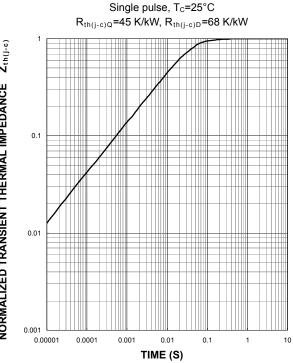

NORMALIZED TRANSIENT THERMAL IMPEDANCE Z_{th(J-c)}

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- •These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- •Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- •All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (www.MitsubishiElectric.com/semiconductors/).

- •When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information containedherein.
- •Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- •The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- •If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
- Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- •Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

© 2013 MITSUBISHI ELECTRIC CORPORATION. ALL RIGHTS RESERVED.